



## Pulley Lagging Mini Diamond


<b>Colour:</b>	Black
<b>Min. temperature:</b>	-30°C
<b>Max. temperature:</b>	70°C
<b>Specific gravity:</b>	1,17 grs/cm <sup>3</sup>
<b>Hardness:</b>	60 Shore A +/- 5
<b>Tensile strength:</b>	12 MPa
<b>Elongation at break:</b>	400%
<b>Abrasion:</b>	130 mm <sup>3</sup>
<b>Article code:</b>	PL60117B

**Features:** Drum lagging with good resistance to abrasion. Made on rotocure.

**Application:** Used to minimize belt slippage and wear on both the drum and conveyor belt.

One side mini diamond profile, other side bonding layer

Thickness (mm)	Width (mm)	Length (mm)	Article code	Rolls per pallet
6,6	1.500	10.000	PL60117B 6/0	10
6,6	2.000	10.000	PL60117B 6/0	10
8	1.500	10.000	PL60117B 8/0	9
8	2.000	10.000	PL60117B 8/0	9
10	1.500	10.000	PL60117B 10/0	6
10	2.000	10.000	PL60117B 10/0	6
12	2.000	10.000	PL60117B 12/0	3
15	2.000	10.000	PL60117B 15/0	3

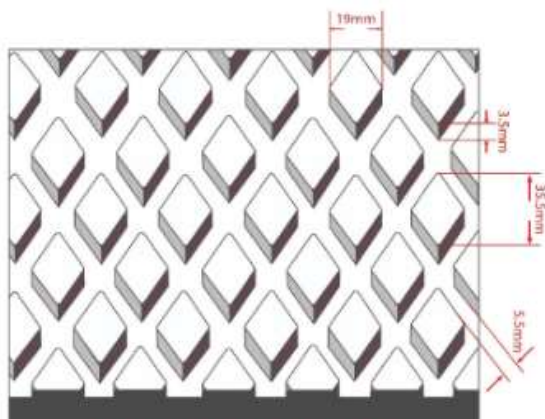

**MINI DIAMOND DESIGN 3.5**  
(With 8, 10, 12, 15mm Thickness)